




Sprockets Position for:
520FT - 520GT - 551FG - 520LBP




Pag 412

Sprockets Position for:
520FTT




Pag 413

Sprockets Position for:
550FT - 550GT - 550GTsi - 550LBP




Pag 414

Sprockets Position for:
550FTT

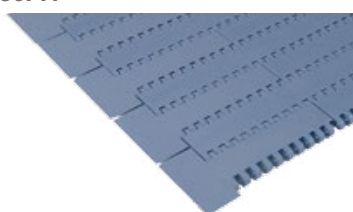


Pag 415

Sprockets Position for:
551FT - 551GT - 551GTsi - 551LBP




Pag 416

Sprockets Position for:
551FTT

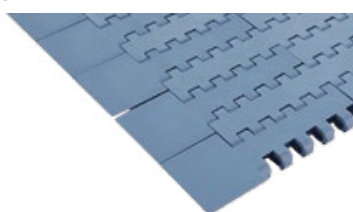

Pag 417

Sprockets Position for:
556FT - 556GT

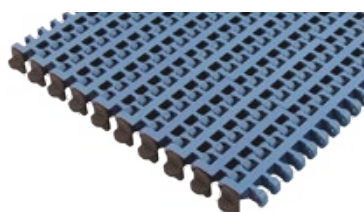


Pag 418

Sprockets position manual

520 Sprockets Position for: 520FT - 520GT - 520FG - 520LBP


Option A

A: 38,25 mm / **B:** 85 mm (steps) / **C:** 46,75 mm

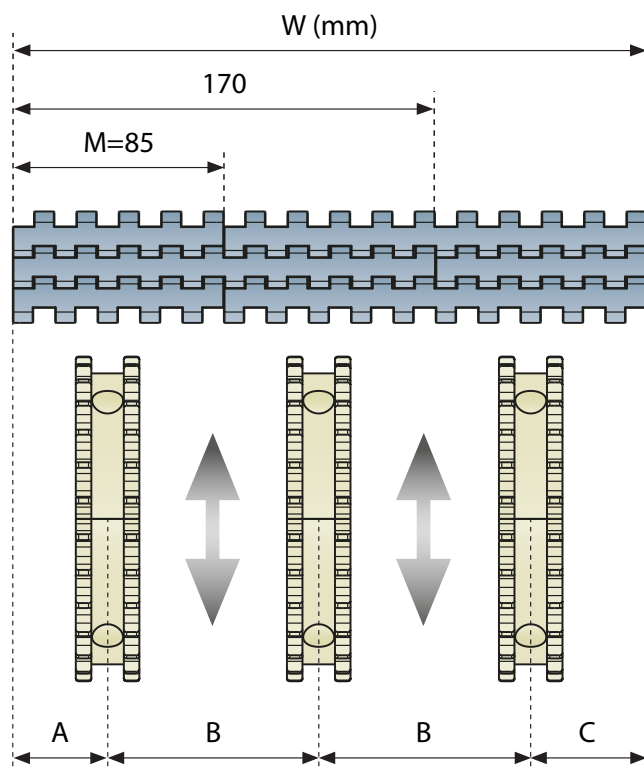

Option B


A: 46,75 mm / **B:** 85 mm (steps) / **C:** 38,25 mm

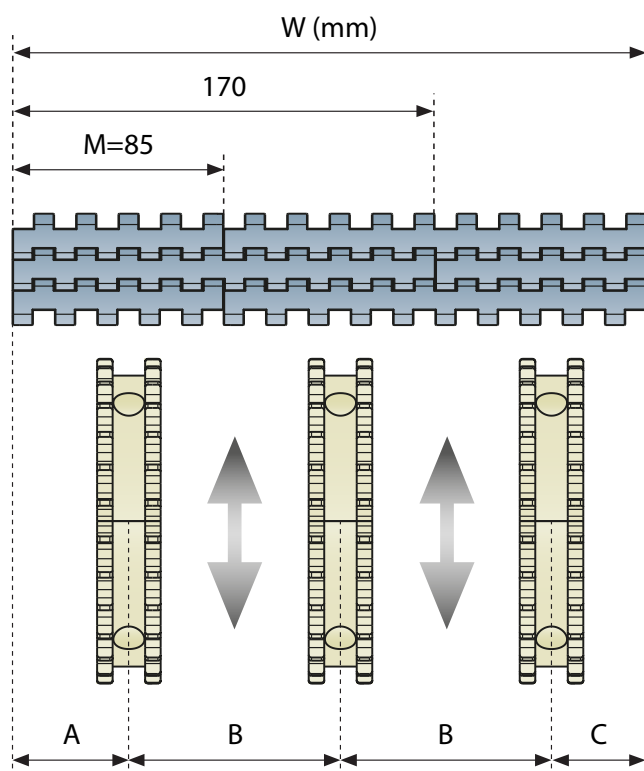

Belt width	Recommended min number of sprockets
85	1
170	2
255	3
340	4
425	5
510	6
595	7
680	8
765	9
850	10
935	11
1020	12
1105	13
1190	14
1275	15
1360	16
1445	17
1530	18

520 Sprockets Position for: 520FTT


A: 38,25 mm/ **B:** 85 mm (steps)

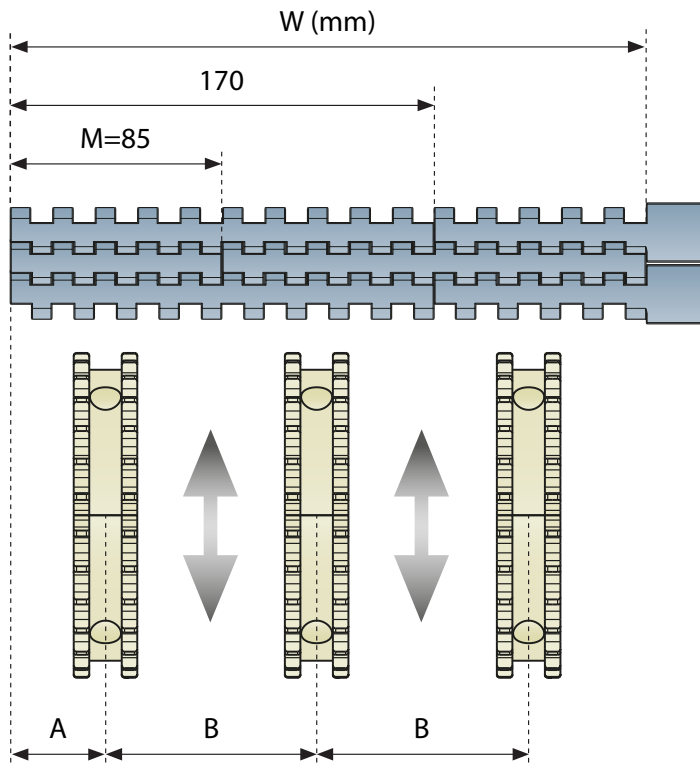

Belt width	Recommended min number of sprockets
85	1
170	2
255	3
340	4
425	5
510	6
595	7
680	8
765	9
850	10
935	11
1020	12
1105	13
1190	14
1275	15
1360	16
1445	17
1530	18

550 Sprockets Position for: 550FT - 550GT - 550GTsi - 550LBP

A minimum: 42,2 mm / B minimum: 85 mm (steps)

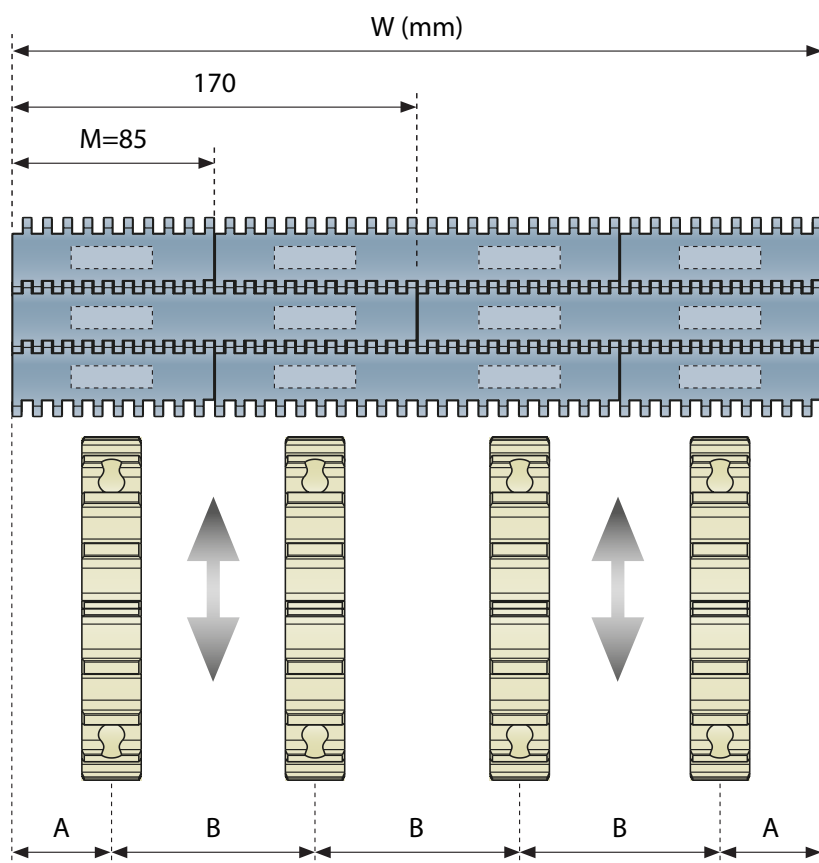


Belt width	Recommended min number of sprockets
85	1
170	2
255	3
340	4
425	5
510	6
595	7
680	8
765	9
850	10
935	11
1020	12
1105	13
1190	14
1275	15
1360	16
1445	17
1530	18

550

Sprockets Position for:
550FTT


A minimum: 42,2 mm / B minimum: 85 mm (steps)

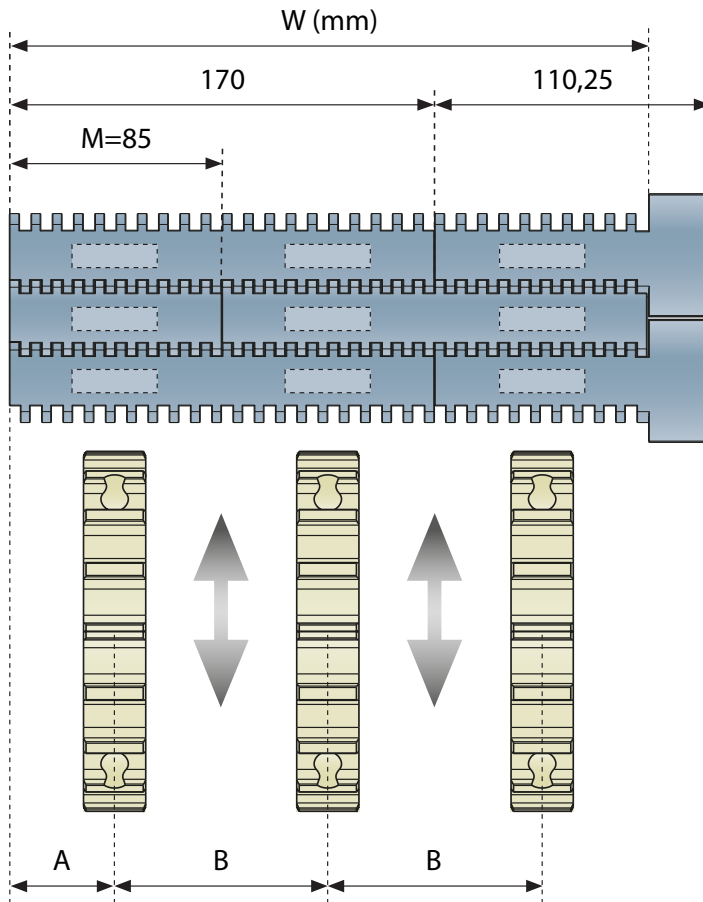

Belt width	Recommended min number of sprockets
85	1
170	2
255	3
340	4
425	5
510	6
595	7
680	8
765	9
850	10
935	11
1020	12
1105	13
1190	14
1275	15
1360	16
1445	17
1530	18

551 Sprockets Position for: 551FT - 551GT - 551GTsi - 551LBP


A minimum: 42,5 mm / B minimum: 85 mm (steps)

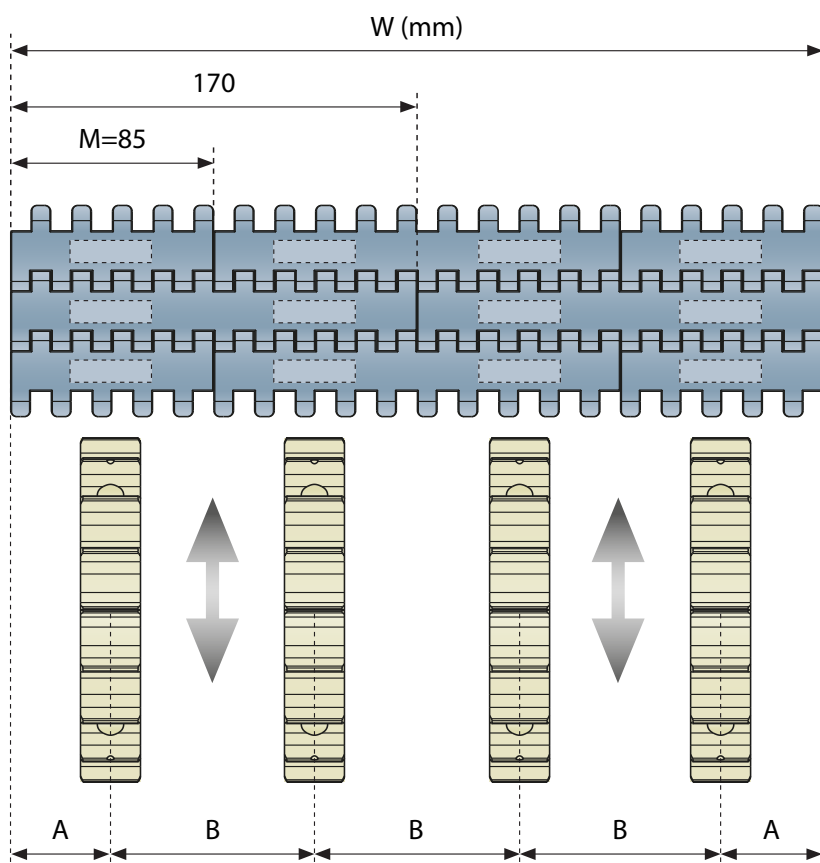

Belt width	Recommended min number of sprockets
85	1
170	2
255	3
340	4
425	5
510	6
595	7
680	8
765	9
850	10
935	11
1020	12
1105	13
1190	14
1275	15
1360	16
1445	17
1530	18

551 Sprockets Position for: 551FTT


A minimum: 42,5 mm / B minimum: 85 mm (steps)

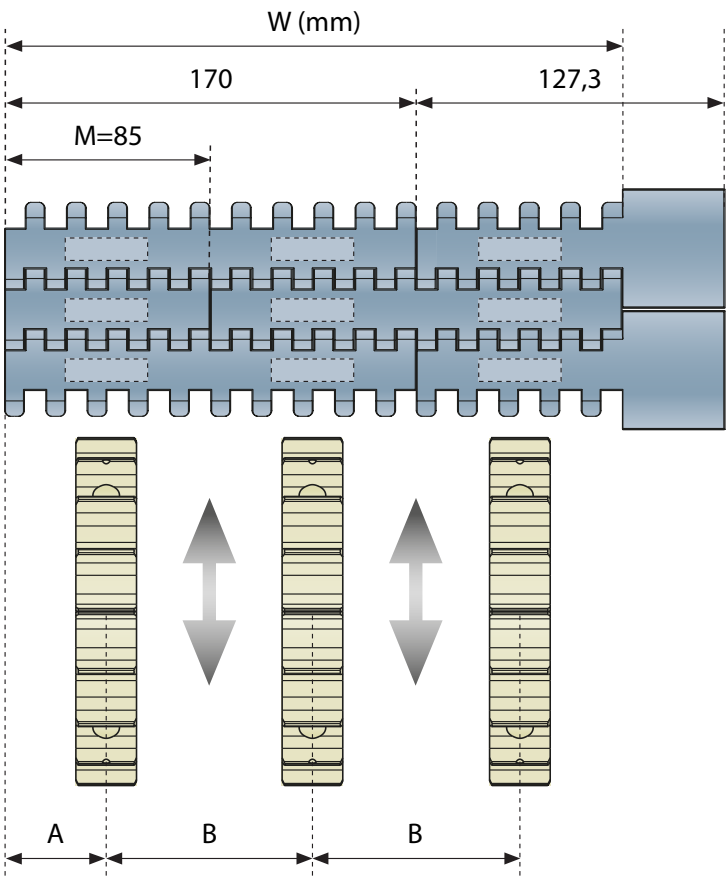

Belt width	Recommended min number of sprockets
85	1
170	2
255	3
340	4
425	5
510	6
595	7
680	8
765	9
850	10
935	11
1020	12
1105	13
1190	14
1275	15
1360	16
1445	17
1530	18

556 Sprockets Position for: 556FT - 556GT

A minimum: 41,1 mm / B minimum: 76,2 mm / C minimum: 35,1 mm

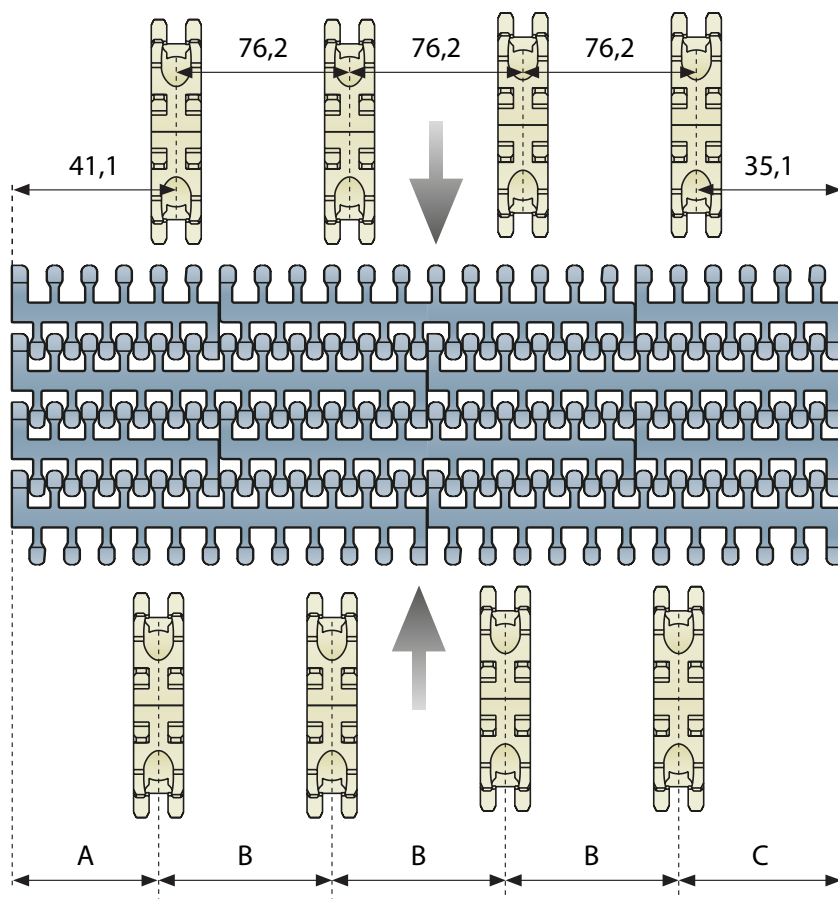

Belt width	Recommended min number of sprockets
0006	2
0009	3
0012	4
0015	5
0018	6
0021	7
0024	8

WARNING!

Sprockets teeth must press against the hinge loops, never against the module's central bridge in the gap between the hinge loops.

